

HUSSMANN®

RLNI, RLNIE

IMPACT

The Ultimate Reach-In Merchandising Solution

RLNIE End Case

RLNI Back to Back




Hussmann Reach-In Merchandiser

RLNI - Back to Back Reach-In

RLNIE - Back to Back Reach-In End Case

HUSSMANN®
Impact

Available with 2, 3, 4, or 5 doors.

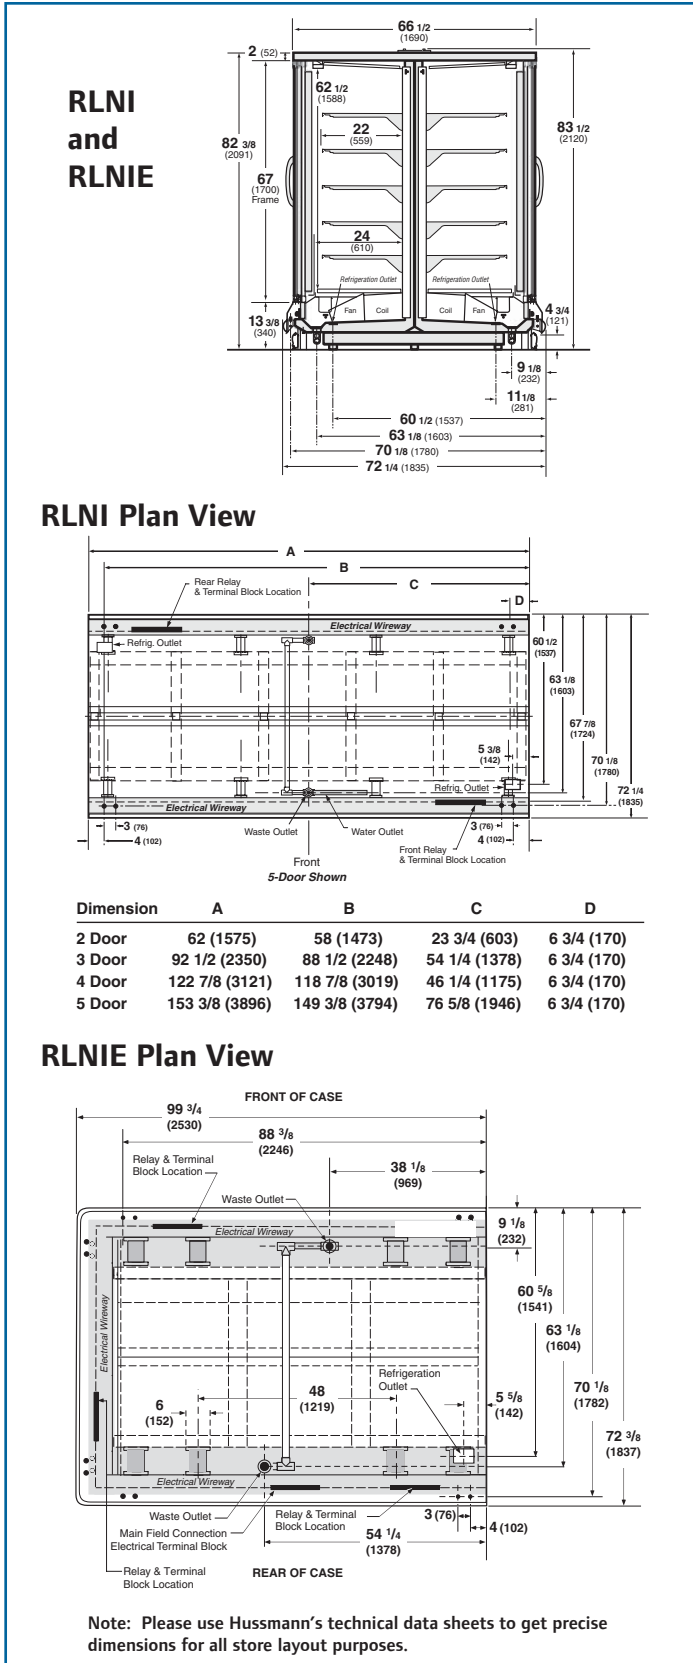

Less Floor Space Required

Installing standard reach-ins back to back requires about 88" of floor space, from bumper to bumper. The RLNI is 72" wide, bumper to bumper, saving about 16".

Reduced Installation Labor

Because the RLNI and the RLNIE are unitized, there is no need to set and line up two rows of back to back cases or add separate end cases.

Lower Energy Costs

The RLNI uses about 4% less energy than our standard depth RL. In addition, it requires 9% less compressor horsepower in the rack, so you save money on your refrigeration systems.

Perfect for Wide Island Replacement

If you want to increase frozen food product facing, this is an ideal way to do it. Most wide islands are about 82" wide. You can replace them with the 72" RLNI and watch your product facing skyrocket.

RLNIE Wrap Around Ends With Endless Doors... Even More Product Facing

Replacing a wide island is one way to increase product facings. Another is to use RLNIE end cases and get 360° of endless doors.

Same Product Capacity as Standard Reach-Ins

The product capacity per door in the RLNI is identical to the capacity of the standard depth RL. Maximum shelf depth of 22" is the same in both cases.

Innovator Doors

First came Innovator doors, reducing energy use by over 20% and increasing product lighting by over 40%. Next, Innovator II completely eliminated anti-sweat heat on doors and door perimeter frames, further reducing energy use by another 20%.

Options:

- Always*Clear can be applied to Innovator or Innovator II doors. It prevents doors from fogging.
- Always*Bright LED lights.

NOTE: These merchandisers are designed for use in stores when temperature and humidity do not exceed 75°F and 55% R.H.

NOTE: (We reserve the right to change or revise specifications and product design in connection with any feature of our products. Such changes do not entitle the buyer to corresponding changes, improvements, additions, or replacements for equipment previously sold or shipped.)

IR Ingersoll Rand
Climate Control Technologies

Web Site: www.hussmann.com
E-mail: hussmann-marketing@irco.com

Hussmann Corporation
12999 St. Charles Rock Rd.
Bridgeton, MO 63044-2483
(314) 291-2000
(314) 298-4756 Fax