

HUSSMANN®

RLTI

IMPACT

Back-to-Back, Extra Tall Island Reach-Ins for Frozen Food and Ice Cream




Back-to-Back, Extra Tall Reach-Ins With Innovator or Innovator II Doors



RLTI - Back-to-Back, Extra Tall Island Reach-In, Low Temp

Island cases available in 4, 6, 8, and 10 door models.

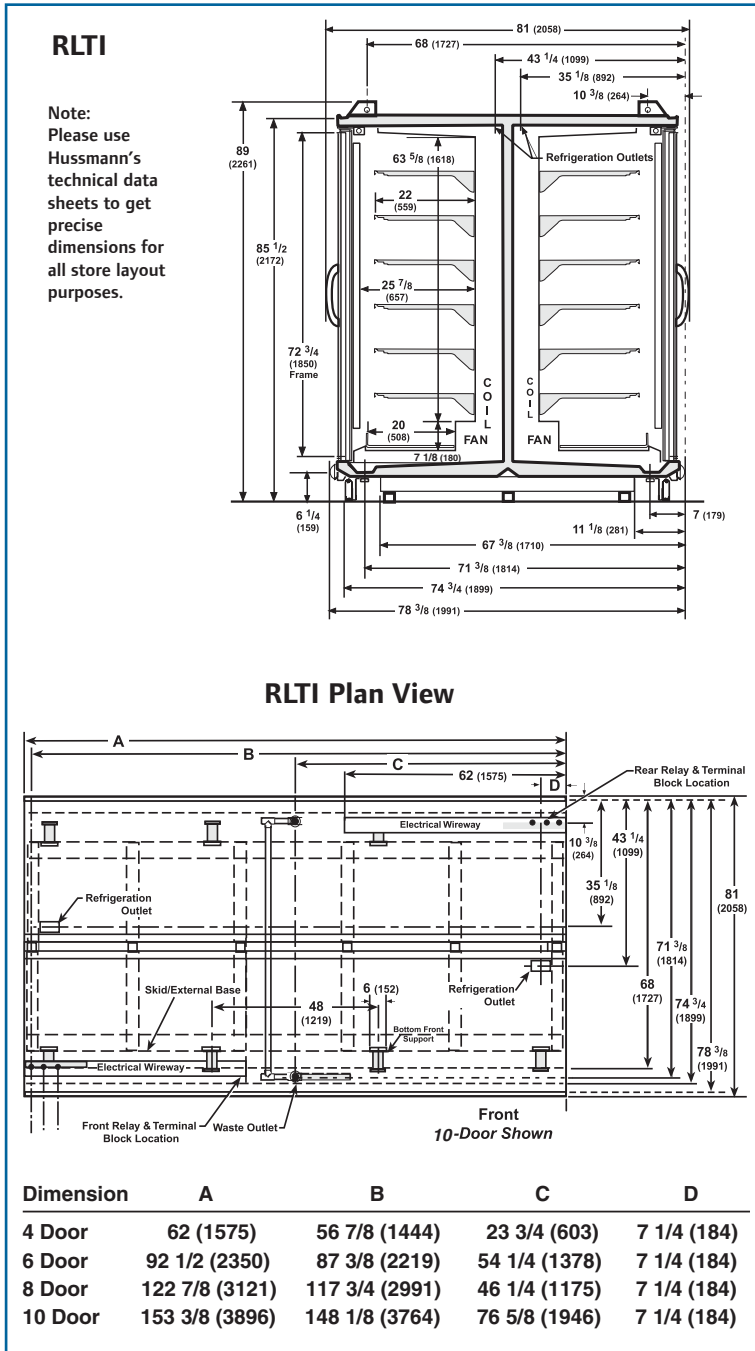

Extra Tall Door

The RLTI door is about 6" taller than the RL door, which means 6 additional inches of vertical merchandising space.

Top of Product Area Only 2" Higher

In the RLTI, the case front was designed to keep products within easy reach. The RLTI doors actually extend lower than on our standard reach-ins, so the top of the product area is only 2" higher. Overall case height is only 89".

Saves Floor Space

The RLTI is only 78" wide (front to front). This saves over 12" of floor space when compared to standard reach-ins installed back-to-back. In a traditional back-to-back reach-in arrangement, case backs must be set at least 6" apart to allow air flow between cases. The RLTI eliminates this space. It is also ideal for remodels when you want to replace a wide island (82" wide) with back-to-back tall reach-ins (78 3/4" wide) and get added vertical merchandising space as well.

Same Product Capacity

The product capacity per door in the RLTI is actually the same as the capacity of the standard depth RL, even though the RLTI is built on a narrower platform. Maximum shelf depth of 22" is the same in both cases.

Innovator or Innovator II Doors

The RLTI is available with Husmann's industry leading Innovator or Innovator II glass doors, providing greater energy efficiency, better lighting and simplified maintenance.

End Caps Available

Reach-in end caps are available for a full 360° reach-in island. End caps come with two reach-in doors and are matched to the width of the RLTI.

Options:

- Always*Clear can be applied to Innovator or Innovator II doors. It prevents doors from fogging.
- Always*Bright LED Lights

NOTE: These merchandisers are designed for use in stores when temperature and humidity do not exceed 75°F and 55% R.H.

NOTE: (We reserve the right to change or revise specifications and product design in connection with any feature of our products. Such changes do not entitle the buyer to corresponding changes, improvements, additions, or replacements for equipment previously sold or shipped.)

Web Site: www.husmann.com
E-mail: husmann-marketing@irco.com



Husmann Corporation
12999 St. Charles Rock Rd.
Bridgeton, MO 63044-2483
(314) 291-2000
(314) 298-4756 Fax